

01/30/98
1529 U.S. PTO

Truesdale Law Office
642 Nightingale Blvd.
Stillwater, MN 55082
(612)430-1670

PATENT

Docket No. 1017US01

Transmittal of Patent Application - Rule 1.53(b)

Assistant Commissioner for Patents
Box: Patent Application
Washington, D.C. 20231

Inventor(s): Paul W. Meyer

Title: **SPHEROIDAL SLAG AND FLY ASH PARTICLES AND APPARATUS AND
PROCESS FOR PRODUCING SAME**

- ☒ Enclosed is the above-mentioned new patent application. It includes 5 sheets of drawings.
- ☒ Enclosed is an executed declaration or oath.
- ☒ Enclosed is an application assignment to Diamond Grit of Ortonville, Inc.
- ☒ The fee for filing the application is computed as follows:

Claims As Filed:

(1) For	(2) Number Filed	(3) Number Extra	(4) Rate	(5) Basic Fee
				\$395.00
Total 50 Claims	50 - 20 =	30	30 x \$11	\$330.00
Independent 5 Claims	2 - 3 =	2	2 x \$41	\$ 82.00

Additional fee for filing one or more multiple dependent claims:

\$135

\$ _____

Total amount due → **\$ 807.00**

- ☒ A check in the amount of \$807.00 is enclosed
- ☒ Please charge any underpayment or credit any overpayment for filing fees under 37 CFR 1.16 to Deposit Account No. 50-0397. Please charge any fees required to maintain pendency of this application to Deposit Account No. 50-0397. This authorization includes the fee for any extension of time under 37 CFR 1.136(a) that may be necessary.
- ☒ A duplicate for fee processing is enclosed.
- ☒ Enclosed is a return receipt postcard.

Registration Number 30696	Telephone Number (612)430-1670	Signature <i>Carole Truesdale</i>
Date January 30, 1998	Printed Name Carole Truesdale	

Certificate of Express Mailing

Pursuant to 37 CFR 1.10 I certify that this application is being deposited on the date indicated below with the united States Postal Service "Express Mail Post Office to Addressee" service addressed to Assistant Commissioner for Patents, Washington, D.C. 20231.

Express Mail Mailing Label No. EI796923768US	Signature of Person Mailing Application <i>Carole Truesdale</i>
Date of Deposit January 30, 1998	Printed Name of Person Mailing Application Carole Truesdale

The PTO did not receive the following listed item(s) return receipt postcard.

**SPHEROIDAL SLAG AND FLY ASH PARTICLES AND
APPARATUS AND PROCESS FOR PRODUCING SAME**

5

FIELD OF THE INVENTION

The present invention relates to a process for spherulizing slag and agglomerated fly ash particles, particularly slag and agglomerated fly ash particles resulting from coal-fired generators, an apparatus suitable for carrying out the process, and the spheroidal particles so produced.

10

BACKGROUND OF THE INVENTION

Each year many tons of materials such as slag and fly ash resulting from combustion of coal in boilers, hereinafter referred to as coal slag and coal fly ash, found in electric generating plants are produced. In the United States in 1993, for example, over 5.6 million metric tons of coal slag and 43.7 million metric tons of coal fly ash were produced as coal combustion byproducts. The greatest use of such materials is found in roofing granules and as sandblasting materials. Other uses are found in cement and concrete products, snow and ice control, and grouting materials. However, only about 55% of the coal slag and only about 22% of the coal fly ash is incorporated into useful products. The remaining amount is generally disposed of in landfills.

15

20

The need to provide additional useful products from such materials and thereby alleviate disposal of these materials in waste storage landfills has long been felt. Forming coal slag or coal fly ash into useful products is considered to be a significant improvement over disposing of such materials in such landfills.

25

A method for manufacturing rounded vitreous beads is known wherein a feed means which can include a reservoir adapted to hold a fluidized bed of feedstock particles and having at least one overflow under gravity. For manufacture of solid beads, crushed glass cullet is the recommended feedstock; for cellular beads, a pelletized feedstock containing glass formers and cellulating agent

30

is recommended. The feedstock is delivered to the upper end of a chamber which includes a pair of opposed walls which are spaced apart by a distance less than their breadth, e.g., 15-30 cm, and which are angled to the horizontal so that the feedstock can pass through the chamber under gravity.

5 In this method, a means for heating the chamber is arranged to heat at least one wall of the pair of opposed walls so that feedstock passing between the pair of opposed walls is heated by radiant heat. The chamber can have segments of increased spacing between the opposed walls from the top of the chamber to the bottom of the chamber as well as differing temperatures in different zones
10 downward through the chamber. For some feedstock compositions, it is desirable to allow the particles to expand while subjected to a temperature in the range of 400°C to 500°C, to heat the particles to 800°C to 900°C for spherulization, and to heat them to about 1200°C for partial devitrification.

A process has also been disclosed for producing ceramic powders based on
15 single- or multi-phase metal oxides, including SiO₂ compounds, exhibiting a narrow particle size distribution. The raw feed material exhibits a specific surface area of 0.05 up to 500 m²/g and is treated in an indirectly heated drop tube furnace in the form of classified granules exhibiting an average diameter of 10 up to 2500 μm for a period of 0.5 up to 15 seconds at a temperature of 500°K up to 3500°K. The raw
20 feed material flows freely into the furnace via a charging device and drops by action of gravity, in a quasi free-falling manner, through the furnace atmosphere, which is oxidizing, inert or reducing, and is cooled. The cooled-off discharged reaction sintered agglomerates are collected and deagglomerated into primary particles by means of an ultrasonic milling device, a sand mill or a jet mill to produce ceramic
25 powder.

Spheroidal particulate material, such as spheroidal cement or smelter slag can be produced by subjecting the particles to a high temperature flame treatment and rapidly cooling them in air. A retention furnace for retaining a molten liquid inorganic material and a nozzle assembly communicated to the retention furnace and
30 capable of scattering therethrough the molten liquid inorganic material are provided. A jet gas entrains the molten inorganic material introduced in the nozzle assembly

and scatters the molten inorganic material to cool it. Gas spray means for spraying the jet gas are also provided.

SUMMARY OF THE INVENTION

5

The present invention, in one aspect, provides spheroidal particles of coal slag and coal fly ash. The spheroidal particles have at least a hard outer shell, a diameter preferably in the range of about 0.001 to 5 mm, more preferably in the range of about 0.1 to 1 mm, and comprise SiO_2 , Al_2O_3 , Fe_2O_3 , FeO , CaO , K_2O , and Na_2O . Components can also include other oxides such as, for example, oxides of heavy metals, and other materials.

The spheroidal particles of coal slag of this invention have high hardness due to the relatively high amounts of Al_2O_3 . This high hardness allows the spheroidal particles to be used, for example, as shot-peening media. The spheroidal shape of the coal slag particles provides low interparticle friction and a low angle of repose, which enables the particles to be used, for example, as fillers for lubricants or plastic resins, or as flowable construction fill. The spheroidal fly ash particles are resistant to leaching of constituent oxides by water due to the reduction in porosity and surface area that occurs on spherulization. These spheroidal fly ash particles are also resistant to hydrolysis due to the relatively low proportions of alkali metals, i.e., Na_2O and K_2O , and relatively high proportions of CaO and Al_2O_3 , in the particles. This also provides resistance to leaching of constituent oxides by water.

The present invention, in another aspect, provides a process for spherulizing irregularly shaped particles of coal slag or agglomerated coal fly ash, resulting from coal combustion. The process includes the steps of:

(a) providing a drop tube having an upper portion, a central portion and a lower portion;

(b) delivering a feedstock of irregularly shaped particles of coal slag or coal fly ash to the upper portion of the drop tube in a manner such that the particles flow in a substantially vertical downward path through the feed tube as individualized particles;

(c) heating the particles to a sufficient temperature by providing heat to the outer surface of the central portion of the drop tube to cause at least the outer surface of the particles to melt such that a majority, i.e., at least about 50 weight percent, of the particles become spheroidal due to surface tension at the outer surface; and

(d) cooling the particles, preferably in the lower portion of the drop tube, to prevent agglomeration.

The coal slag or agglomerated coal fly ash feedstock, which can range in size from, for example, about 0.001 to 10 mm, preferably from about 0.1 to 1 mm, can be delivered through a feed tube having a small discharge port, having one or more holes, each with a diameter from, for example, at least the maximum particle diameter of the feedstock to at most one-half the diameter of the drop tube, and more preferably, from one to ten times the maximum particle diameter of the feedstock, at the lower end thereof.

The present invention, in a further aspect, provides an apparatus for spherulizing particles comprising

(a) a substantially vertical elongate drop tube;

(b) a feed tube extending into the upper terminal portion of the drop tube and having a substantially closed lower terminal portion with a discharge port therein, the vertical axis of the discharge port being substantially on the vertical axis of the drop tube;

(c) feed means for supplying a feedstock to the feed tube;

(d) vibrating means for intermittently rapping the feed tube to cause discharge of the feedstock from the feed tube in a substantially vertical downward path through the drop tube as individualized particles;

(e) heating means proximate the outer portion of the drop tube and proximate a central portion of the drop tube, the heating means being capable of providing sufficient heat within the drop tube to cause the viscosity of at least the outer portion of the particles to become sufficiently low to allow the surface tension of the particles to spherulize the particles;

(f) cooling means to effect cooling of the spherulized particles such that the particles do not adhere to each other; and

(g) means for collecting the spherulized particles.

The apparatus of the invention is particularly useful with particles having
5 irregular shapes such as, for example, coal slag or agglomerated coal fly ash. The
vibrating means can be provided by a magnet and coil, the coil being intermittently
powered to cause the magnet to rap the feed tube, or by a solenoid. The feedstock
can be provided to the feed tube, for example, by gravity means. The heat can be
provided, for example, by a radiant heater, by an electric heating element or gas
10 fired or particle burning heating elements encircling the drop tube, by convection
heat such as provided by, for example, direct flame or preheated air, or by induction
or dielectric heating of the drop tube and/or the feedstock. A fan can be provided
adjacent the lower end of the drop tube, if necessary, to provide suction pressure to
overcome any chimney effect caused by heating the central portion of the drop tube.

15 The present invention, in another aspect, provides a feed system for feeding
irregularly shaped particles comprising:

(a) a feed tube oriented substantially vertically and having a substantially
closed lower terminal portion with a discharge port therein;

(b) feed means for supplying a feedstock of irregularly shaped particles to
20 the feed tube; and

(c) vibrating means for intermittently rapping the feed tube to cause
discharge of the feedstock from the feed tube in a substantially vertical downward
path as individualized particles.

The present invention, in another aspect, provides a process for feeding
25 irregularly shaped particles comprising:

(a) feeding irregularly shaped particles to a feed tube oriented substantially
vertically and having a substantially closed lower terminal portion with a discharge
port substantially centered on the vertical axis of the feed tube;

(b) intermittently rapping the feed tube to cause the particles to discharge
30 from the feed tube in a substantially vertical downward path and at a rate at which
the particles remain individualized.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a cross-sectional side view of an apparatus useful in the process of the present invention.

5 FIG. 2 is an enlarged cross-sectional view of the feed mechanism of the apparatus shown in FIG. 1.

FIG. 3 is a cross-sectional view of an alternative feed mechanism useful with the apparatus of the invention.

10 FIG. 4 is photomicrograph produced using a scanning electron microscope (SEM) of a coal slag feedstock used in Example 1 at a magnification of 27X.

FIG. 5 is an SEM photomicrograph of a spheroidal coal slag product prepared in Example 1 at a magnification of 27X.

FIG. 6 is an SEM photomicrograph of a coal fly ash feedstock used in Example 2 at a magnification of 27X.

15 FIG. 7 is an SEM photomicrograph of a spheroidal coal fly ash product prepared in Example 2 at a magnification of 27X.

DETAILED DESCRIPTION OF THE INVENTION

20 FIG. 1 shows apparatus 10 useful in the present invention. Feedstock 11 which comprises irregularly shaped particles of coal slag or agglomerated coal fly ash delivered by means of delivery system 12 which includes feed tube 13 having a discharge port 14, at the bottom thereof. Feedstock can be fed into feed tube 13 by use of a gravity feed utilizing, for example, funnel 15 as shown.

25 Feed tube 13 can be formed from various materials including, but not limited to, ceramics such as, for example, borosilicate glass, quartz, silicon carbide or alumina, or refractory metals such as, for example, Inconel 600 or platinum. Feed tube 13 can also be formed from or lined with materials exhibiting low adhesion and/or low coefficient of friction with the feedstock at elevated temperatures, e.g.,
30 in the range of about 500°C to 1000°C or more, including, but not limited to, refractory ceramics such as, for example, chrome oxide, zirconium oxide, refractory

metals such as, for example, platinum or platinum-gold alloy, or refractory materials requiring non-oxidizing atmospheres, such as, for example graphite or boron nitride.

Discharge of feedstock 11 from feed tube 13 can be accomplished, for example, by gravity; intermittent vibration; mechanical scraping, such as a rotary or reciprocating paddle or a feed screw; or air or mechanical fluidization with either overflow or underflow, all of which are well-known to those skilled in the art.

In FIG. 1, intermittent vibratory means are provided. Magnet 16 is positioned adjacent an inner portion of feed tube 13. As can be seen, feed tube 13 is positioned within an upper portion of drop tube 17 and coil 18, which is connected to a power supply (not shown), is positioned outwardly of drop tube 17. The power supply intermittently supplies power to coil 18 such that magnet 16 intermittently jars the tube sufficiently, the frequency and force dependent on the particle size, to encourage flow of feedstock 11 through discharge port 14 without blockage thereof.

Discharge port 14 can have, for example, a regular cross-section, such as circular or polygonal, or an elongate cross-section, such as an ellipse or a rectangular slot, or an array of holes, e.g., in a circular pattern. Discharge port 14 can also have, for example, a topology such as an annular slot, i.e., a ring, or an open circle or other various open shapes. Discharge port 14 can also be a bare wire screen or a ceramic coated wire screen, to limit or provide a more uniform flow rate over the cross-section of discharge port 14. Delivery of feedstock 11 is preferably carried out at a rate such that the particles have minimal contact with each other as they flow down the drop tube and, thus, remain individualized without sticking to each other. The delivery of feedstock 11 is also such that substantially all of the particles reach the bottom of the drop tube. The spacing between the lower terminal portion of the funnel stem and the bottom of the feed tube is adjusted such that the depth of the feedstock at the bottom of the feed tube is preferably 1 to 100 particle diameters or more, and most preferably, 1 to 10 particle diameters.

Drop tube 17 is preferably circular in cross-section and can vary in inside diameter from, for example, about 0.01 to 10 meters. Drop tube 17 is preferably oriented substantially vertically and can have a height of from, for example, about

0.01 to 100 meters or more, more preferably about 1 to 50 meters, most preferably about 2 to 20 meters. Generally, the inner wall 20 of drop tube 17 is vertical, although wall 20 can be as much as about 10° inward in the downward direction and perform adequately. Preferably, any angle from the vertical is outward in the downward direction to minimize the rate of impact of particles on inner wall 20.

Drop tube 17 can be of various materials including, for example, ceramics such as fused quartz, aluminum oxide, or silicon carbide, iron-nickel-chromium alloys such as, for example, stainless steel type 304 or 330, Inconel™ 600, or Hastily C-276. The inner wall 20 of drop tube 17 can be coated, tiled, or lined with various materials to minimize adhesion between the particles and inner wall 20, and minimize corrosion of inner wall 20 by any liquid slag or fly ash which adheres to inner wall 20. Such coatings include, but are not limited to, chrome oxide, magnesium oxide, zirconium oxide; silicon nitride, silicon carbide, or mixtures thereof, or platinum-gold alloys; or, in non-oxidizing atmospheres graphite or boron nitride.

Drop tube 17 is preferably heated by radiant heat provided, for example, by electric heating element 21 as shown in FIG. 1 or, alternatively, by gas fired or particle burning heating elements encircling the drop tube. Other heat sources, such as, for example, convection heat such as provided by, for example, direct flame or preheated air, or induction or dielectric heating methods can be considered. Generally, the particles drop slowly through the heated zone, preferably having a residence time, for example, from about 0.001 to 100 seconds, more preferably of from about 0.1 to 10 seconds, the residence time required being roughly proportional to the particle diameter.

Preferably, heating element 21 extends along drop tube 17 from a position below discharge port 14 of feed tube 13 for a distance sufficient to heat the vitreous particles to a temperature at which at least the outer surface melts, and the viscosity is sufficiently low to allow the surface tension of the melt to spherulize the particles. For coal slag and coal fly ash particles, the outer surface melts at a temperature in the range of about 1000°C to 1500°C, and the surface tension is about, for example, about 0.2 to 0.5 N/m. Preferably, the temperature at outer wall 19 of

drop tube 17 is between about 1000°C and 1700°C, more preferably between about 1200°C to 1500°C, as measured by thermocouple 29 inserted through port 30.

Heating element 21 does not extend to the lower end of drop tube 17, the unheated portion providing a cooling zone where the spherulized particles can cool to about 500°C to 1000°C at which temperature adhesion of the particles does not occur and the particles remain individualized.

Outer wall 19 of drop tube 17 and heating element 21 are preferably encased in insulation 22, at least in the heating zone thereof. Insulation 22 can be, for example, ceramic fiber, hollow ceramic spheres, or refractory brick. Insulation 22 can comprise, for example, ceramic materials such as alumina-silica, alumina, zirconia, silica, magnesia, rock/mineral or glass; or carbon when an inert atmosphere is used; all of which are well-known in the art. Generally, the insulation can be, for example, about 0.05 to 2 meters in thickness with greater thicknesses typically being used with larger diameter drop tubes.

Insulation 22 is preferably encased in a protective structural shell 23 which aids in supporting the weight of the insulation. Shell 23 can comprise, for example, carbon steel, stainless steel, nickel/chromium alloy, titanium, aluminum, ceramic materials or high temperature-rated plastics. The thickness of the shell wall is not particularly critical, but should be sufficient, where used, to support the insulation, prevent airflow through the shell wall, and to protect the insulation and drop tube from inadvertent impact.

Shell 23 preferably rests on blower box cover 24 on blower box 25. Blower box cover 24 and blower box 25 are constructed to support structural shell 23, heating element 21, drop tube 17, the feed system and ancillary equipment. An optional exhaust fan 26 can be provided to overcome any chimney effect generated in drop tube 17 by heating element 21.

Within the blower box, means for catching the spherulized particles are provided. In FIG. 1, the catching means comprises funnel 27 beneath which sleeve 31 is press-fit into catch tube 28 to prevent air from leaking into the funnel stem.

Other means for catching the spherulized particles such as, for example, fluidized beds, conveyor belts, and the like which are well-known in the art can also be used.

Adjuvants can be added to a coal fly ash feedstock or to a very fine, for example, less than about 0.1 mm in particle size, coal slag feedstock, to change the surface character of the spherulized particles. Such adjuvants are typically added as a fine powder, adhere to the feedstock particle surface or contact the particle surface while molten and, thus, become a part of the surface of the particle.

Pigments can be added to change the surface color, such as titanium dioxide added to whiten the surface. Metals such as copper or aluminum can be added to make the particle surface conductive. Other metals such as silver or gold can be added to make the particle surface optically reflective or to enhance the aesthetic characteristics. Flow enhancers, for example, powdered graphite, talc or mica, can also be added to the feedstock.

Additives which can be combined with the fly ash feedstock or finely divided coal slag feedstock prior to agglomeration include materials which provide, for example, Al_2O_3 to provide added hardness, B_2O_3 to provide added stiffness, BaO or SrO to improve toughness, Na_2O or K_2O to lower the melting point, although an increase in leachability may also result, and H_2O , NO , NO_2 , SO_3 , or CO_2 , to provide porous or hollow spheroids, or mixtures thereof.

The spherulized particles can be coated after cooling with such materials as, for example, pigments to alter color, metals to alter properties such as, for example, conductivity or reflectance, lubricants, and hydrophobic materials. Such coating materials can be coated on the spherulized particles in a fluidized bed with heat, by application including a bonding agent such as, for example, a resin bonding agent, or other coating means well-known to the art.

The spherulized particles of the invention have various chemical compositions depending on the source of the feedstock. For example, coal slag and coal fly ash generally has the following composition:

SiO_2 , preferably in the range of about 20 to 60 weight percent, more preferably in the range of about 40 to 55 weight percent;

Al_2O_3 , preferably in the range of about 10 to 35 weight percent, more preferably in the range of about 15 to 30 weight percent;

Fe₂O₃ and FeO, preferably in the range of about 5 to 35 weight percent,
more preferably in the range of about 10 to 20 weight percent;
CaO, preferably in the range of about 1 to 20 weight;
Na₂O and K₂O, preferably in the range of about 0.1 to 4 weight percent.

5

The spherulized particles of the invention can be used in various processes and products for which the irregularly shaped feedstock would be unsuitable. Such processes include, for example, shot-peening, polishing, sandblasting of soft materials or precision surfaces, and filtering. The spherulized particles can be used,
10 for example, as fluidized heat transfer media, flowable construction fill, and plastic or lubricant filler, due to the high flowability, smooth surface and compact shape of the spheroidal particles. The spherulized coal slag particles can be crushed under pressures of, for example, at least about 700 MPa (100,000 psi) and used as roofing granules, abrasives, and the like.

15 Objects and advantages of this invention are further illustrated by the following examples, but the particular materials and amounts thereof recited in these examples, as well as other conditions and details, should not be construed to unduly limit this invention. All parts and percentages are by weight unless otherwise indicated.

20

EXAMPLES

Example 1

Referring to FIG. 1, a Kimax™ borosilicate glass funnel having about a 51 mm (2 in.) diameter top opening and about a 152 mm (6 in.) long stem with the
25 inner diameter of the stem being about 2.5 mm (0.1 in.) was placed into a feed tube. The feed tube of Kimax™ borosilicate glass had an inner diameter of about 17 mm (0.67 in.) and was about 152 mm (6 in.) long and was supported by wires resting on the top edge of the drop tube. The bottom of the feed tube was slightly convex and had about a 1 mm (0.025 in.) discharge port in the center thereof. The stem of the
30 funnel was flush with the inside wall of the feed tube. The feed tube was suspended in the upper portion of a drop tube which was of fused quartz and had an inside

diameter of about 25 mm (1 in.), and outside diameter of about 29 mm (1.14 in.), and a length of about 0.97 m (38.25 in.).

5 A ferrite ceramic magnet with a diameter of about 12.7 mm and a thickness of about 4.8 mm was suspended by means of a nichrome wire inside the feed tube and about 25 mm (1.0 in.) above the discharge port. The magnet was wrapped in 2 layers of aluminum foil, about 25 μ m thick, to prevent contamination of the feedstock with ferrite magnetic particles. Enameled copper wire having a total diameter of about 1.71 mm, the wire being about 1.63 mm in diameter (14 gauge) formed a wound coil. The coil had an inner diameter of about 44 mm, an outer
10 diameter of about 88 mm, and a thickness of about 24 mm, with an inductance of about 2.2 mH and a series resistance of about 0.33 ohms, was connected to a 12 volt pulse generator through a 4 ohm 50 watt current-limiting resistor. The coil was placed surrounding the outer portion of the drop tube with the lower surface of the coil about 19 mm (0.75 in.) above the discharge port and intermittent current
15 was supplied to the coil which caused the magnet to intermittently rap the feed tube to provide continuous discharge of the feedstock through the discharge port.

A 2040 watt heating element which was normally operated at about 900 to 1000 watts and which had an inner diameter of about 32 mm (1.26 in.), an outer diameter of about 52 mm (2.05 in.) and a length of about 0.6 m (24 in.) and was
20 powered directly from an AC line carrying about 200 V rms through a 25 amp solid-state relay, the duty cycle of which was controlled by an adjustable pulse generator, to obtain the required heater temperature. The top of the heating element was located about 23.5 cm (9.25 in.) below the top of the drop tube.

Insulation of vitreous aluminosilicate ceramic fiber, available from
25 Thermcraft, Inc., which had an inner diameter of about 5.2 cm (2.05 in.), an outer diameter of about 19.1 cm (7.5 in.) and a length of about 71 cm (28 in.) was placed around the drop tube and heating element and extended downward from a position about 18.4 cm (7.25 in.) from the top of the drop tube.

An aluminum structural shell having a wall thickness of about 0.32 mm
30 (0.0125 in.) surrounded the insulation and extended about 12.7 cm (5 in.) above the insulation and about 7.6 cm (3 in.) below the insulation. The aluminum shell rested

on an about 30.5 cm (12 in.) square aluminum blower box cover which was about 2.9 mm (0.114 in.) thick. The blower box of about 0.79 mm (0.031 in.) thick aluminum was about 30.5 cm (12 in.) square and about 7.6 cm (3 in.) in height. The blower box cover had a circular opening about 5.1 cm (2 in.) in diameter, substantially centered in the top thereof, through which the drop tube extended. A Type FN12B3, 12 volt, 220 mA blower available from Comair-Rotron, was placed in the blower box proximate a port 7.9 cm (3.125 in.) square. The blower was rated to provide a static pressure of about 68 Pa (0.27 in H₂O) at zero flow and full power. A motor speed control reduced the motor power to provide a static pressure of about 1.5 Pa (0.006 in H₂O) at zero flow to oppose the chimney effect in the drop tube.

A Kimax™ borosilicate glass funnel having a mouth about 7.6 cm (3 in.) in diameter was located in the blower box such that the mouth of the funnel was about 1.25 cm (0.5 in.) below the blower box cover. The lower end of the drop tube was flush with the lower surface of the blower box cover. The stem of the funnel, about 1.28 cm (0.50 in.) inner diameter, about 1.69 cm (0.67 in.) outer diameter and about 3.5 cm (1.38 in.) long extended through an opening about 1.9 cm (0.75 in.) in diameter in the base of the blower box. A Kimax™ borosilicate glass catch tube having an outer diameter of about 2.5 cm (1 in.) and a length of about 5.0 cm (2 in.) was sealed onto the terminus of the funnel stem to collect the spherulized product.

At the midpoint of the heating element, a horizontal bore having a diameter of about 6.3 mm (0.25 in.) extended through the structural shell, the insulation and the heating element. Into this bore was placed a closed-end mullite/glass tube having an inner diameter of about 4.5 mm (0.18 in.), and outer diameter of about 6.3 mm (0.25 in.), and a length of about 15 cm (6 in.) such that the closed end of the mullite/glass tube abutted the drop tube. A type K thermocouple fabricated from about 0.81 mm diameter (20 gauge) Chromel/Alumel™ wire was seated within the mullite/glass tube to measure the temperature at the midpoint of the heated portion of the drop tube.

The heating element was turned on and when the temperature of the drop tube, as measured by the thermocouple, reached about 1250°C, coal slag feedstock,

such as that shown in FIG. 4, having a particle size of about 0.23 to 0.27 mm was fed through the funnel into the feed tube. The terminal portion of the funnel stem was at a height above the bottom of the feed tube such that the feedstock depth in the feed tube was maintained at about 1 mm. The feed tube was rapped an average of about 9 times per second by the magnet at a magnetic torque of roughly 0.001 N·m in 10 msec pulses causing the feedstock to enter the drop tube at a rate of about 2.4 mg/sec. The residence time of the particles in the feed tube was about 0.5 seconds.

The product which was spherulized in the heated portion of the drop tube was sufficiently cool when it was discharged from the drop tube that minimal sticking together of particles occurred. The product yield was about 83% of the mass of the particles fed into the drop tube.

Five spheroids were randomly chosen and tested for hardness using a Vickers Diamond Pyramid penetrator with a 50 g load. The hardness ranged from 478 HV to 551 HV, with an average of 503 HV. The bulk density of the spheroidal slag product was determined to be roughly 1.8 g/cm³.

Up to about 30% of the product was in the form of duplex particles, at least about 70% of which readily disassociated in the course of normal handling. On inspection, about 90% of the irregularly shaped feedstock particles were spherulized. The spherulized coal slag product can be seen in FIG. 5. In FIG. 5 spherulized product 34 can be seen to be generally spheroidal, ranging from somewhat elongate to substantially spherical. Irregular particles 36 are suspected to be unburned coal or contaminant due to use of material other than coal in the combustion mix for the coal-fired boiler.

Example 2

The same apparatus was used as described in Example 1. Coal fly ash was obtained from an electric power generating plant burning low-sulfur subbituminous coal known to form an ash having a high enough CaO content to self-cement. The fraction of as-received agglomerated granular feedstock that was about 0.16 to 0.23 mm in size, shown in FIG. 6, was oven dried for about 3.5 hours at about 265°C.

The bulk density of this coal fly ash feedstock was determined to be roughly 0.6 g/cm³. When the drop tube temperature reached about 1250°C as determined by the thermocouple reading, the oven-dried agglomerated coal fly ash was fed through the funnel into the feed tube. The feed tube was rapped at an average rate of about 9 times per second by the magnet as in Example 1, causing the feedstock to enter the drop tube at a rate of about 0.35 mg/sec. Due to the smaller size and lower bulk density of the feedstock, the bulk density being about 35% that of coal slag feedstock, the feed rate was significantly less than in Example 1.

The product which was spherulized in the heated portion of the drop tube was sufficiently cool when it was discharged from the drop tube that no sticking together of particles occurred. On inspection, substantially all of the irregularly shaped coal slag feedstock particles were spherulized. The product yield was about 75% of the mass of the particles fed into the drop tube.

Spheroids were randomly chosen and tested for hardness using a Vickers Diamond Pyramid penetrator with a 50 g load. The hardness could not be determined due to the friability of the spheroidal particles. The bulk density of the spheroidal fly ash product was determined to be roughly 1.8 g/cm³.

The spherulized coal slag product can be seen in FIG. 7. In FIG. 7, the product can be seen to be substantially spheroidal.

Example 3

An apparatus was set up as in FIG. 2, with the omission of heating element 21, insulation 22, and shell 23. A tube having an inner diameter of about 7.6 cm (3 in.) and a length of about 61 cm (24 in.) was substituted for the quartz drop tube. A clamp supported the feed tube, located at its upper end. Coal slag feedstock, about 0.32 mm to 0.4 mm in size, was fed into the funnel and was allowed to fall to the lower portion of the drop tube. The coil was powered such that the magnet rapped the inner wall of the feed tube once per second at a magnetic torque of roughly 0.001 N·m and a pulse width of about 10 msec.

A sheet of paper 21.6 cm wide and 27.9 cm long, marked with concentric circles from 1 cm to 10 cm diameter in 1 cm increments, was sprayed for about one

second with Super 77™ Spray Adhesive, available from 3M Company, at a distance of about 30 cm with the spray directed to the center of the circular pattern. The paper was centered about 6 mm (0.25 in.) beneath the drop tube. Within no more than 60 seconds after spraying the adhesive, power was supplied to the coil as described above and the magnet began rapping the feed tube. After 45 seconds, the power was turned off and the paper was removed from beneath the drop tube. Evaluation by visual inspection showed that 86% of the 154 coal slag particles adhering to the paper fell within the 3 cm circle on the paper.

10 Example 4

 An apparatus was set up as in FIG. 3, with the omission of heating element 21, insulation 22, and shell 23, and the solenoid being oriented at about a 45° downward angle to the rim of the feed tube with the solenoid slug abutting the feed tube rim. The solenoid used was about 1.2 x 1.2 cm wide x 2.5 cm long with a 6 VDC, 38 ohm coil, and a 4.8 mm diameter x 27 mm long steel slug. The slug was fitted on its inside end with a 6-turn steel spring having an average coil diameter of 3 mm and a length of about 6 mm, wound from about 0.25 mm diameter high-carbon steel music wire. The solenoid was connected to a 12 V pulse generator and was driven with 10 msec pulses at a rate of about 9 pulses per second.

20 Coal slag feedstock, about 0.32 mm to 0.4 mm in size, was fed into the funnel and was allowed to fall to the lower portion of the drop tube. Power was supplied to the solenoid as described above to effect rapping of the feed tube. The feed rate of the coal slag feedstock was determined to be about 1 mg/sec.

25 Various modifications and alterations of this invention will become apparent to those skilled in the art without departing from the scope and spirit of this invention, and it should be understood that this invention is not to be unduly limited to the illustrative embodiments set forth herein.

What is claimed is:

1. Spheroidal particles prepared from coal slag and coal fly ash having at least a hard outer shell and comprising SiO_2 , Al_2O_3 , Fe_2O_3 , FeO , CaO , K_2O , and Na_2O .
5
2. The spheroidal particles of claim 1 wherein said coal slag particles comprise: SiO_2 in the range of about 20 to 60 weight percent; Al_2O_3 in the range of about 10 to 35 weight percent; Fe_2O_3 and FeO in the range of about 5 to 35 weight percent; CaO in the range of about 1 to 20 weight percent; and Na_2O and K_2O in the range of about 0.1 to 4 weight percent.
10
3. Spheroidal particles of claim 1 wherein said particles are in the range of 0.001 to 5 mm in size.
15
4. Spheroidal particles of claim 1 wherein said particles are in the range of 0.1 to 1 mm in size.
5. Spheroidal particles of claim 1 wherein said particles are coated with pigments, metals, lubricants, or hydrophobic materials.
20
6. Spheroidal particles of claim 1 wherein said particles are prepared from coal fly ash or finely divided coal slag, or further comprising added CaO , Al_2O_3 , B_2O_3 , BaO , SrO , Na_2O , K_2O , or mixtures thereof.
25
7. Spheroidal particles of claim 1 wherein said particles are hollow.
8. Spheroidal particles of claim 1 wherein said particles are magnetic.
30

9. A process for spherulizing irregularly shaped particles of coal fly ash or coal slag comprising the steps of:

(a) providing a drop tube having an upper portion, a central portion and a lower portion;

(b) delivering a feedstock of irregularly shaped particles of coal slag or coal fly ash to said upper portion of said drop tube in a manner such that said particles flow in a substantially vertical downward path through said feed tube as individualized particles;

(c) heating said particles to a sufficient temperature by providing heat to the outer surface of said central portion of said drop tube to cause at least the outer surface of said particles to melt such that a majority of said particles become spheroidal due to surface tension at the outer surface; and

(d) cooling said particles to prevent agglomeration.

10. The process of claim 9 wherein said feedstock is in the range of about 0.001 to 10 mm in size

11. The process of claim 9 wherein said feedstock is in the range of about 0.1 to 1 mm in size.

12. The process of claim 9 wherein said feedstock of coal fly ash or coal slag further comprises added SiO_2 , Al_2O_3 , FeO , Fe_2O_3 , CaO , BaO , SrO , B_2O_3 , Na_2O , K_2O or mixtures thereof, with the proviso that said coal slag is less than 0.1 mm in size.

13. The process of claim 9 wherein said feedstock of coal fly ash or coal slag further comprises materials which on heating provide H_2O , NO , NO_2 , SO_3 , CO_2 , or mixtures thereof, with the proviso that said coal slag is less than 0.1 mm in size.

14. The process of claim 9 wherein the surface temperature on the inner wall of the drop tube is between about 1000°C to 1700°C.

5 15. The process of claim 9 wherein said coal slag or coal fly ash particles reach a temperature of about 1000°C to 1500°C.

16. The process of claim 9 wherein said spheroidal particles are subjected to a crushing step.

10 17. The process of claim 9 wherein said feedstock is delivered to said drop tube by gravity.

18. An apparatus for spherulizing particles comprising

15 (a) a substantially vertical elongate drop tube;

(b) a feed tube extending into the upper terminal portion of said drop tube and having a substantially closed lower terminal portion with a discharge port therein, the vertical axis of the discharge port being substantially on the vertical axis of said drop tube;

20 (c) feed means for supplying a feedstock to said feed tube;

(d) vibrating means for intermittently rapping said feed tube to cause discharge of said feedstock from said feed tube in a substantially vertical downward path through said drop tube as individualized particles;

25 (e) heating means proximate the outer portion of said drop tube and proximate a central portion of said drop tube, said heating means being capable of providing sufficient heat within said drop tube to cause the viscosity of at least the outer portion of said particles to become sufficiently low to allow the surface tension of said particles to spherulize said particles;

(f) cooling means to effect cooling of said spherulized particles such that said particles do not adhere to each other; and

30 (g) means for collecting said spherulized particles.

19. The apparatus of claim 18 wherein said drop tube is formed from ceramic or iron-nickel-chromium alloy.

20. The apparatus of claim 19 wherein said ceramic is fused quartz,
5 aluminum oxide, or silicon carbide.

21. The apparatus of claim 18 wherein said feed tube is formed from ceramic or refractory metal.

10 22. The apparatus of claim 21 wherein said ceramic is borosilicate glass, quartz, silicon carbide or alumina.

23. The apparatus of claim 21 wherein said refractory metal is iron-nickel-chromium alloy or platinum.
15

24. The apparatus of claim 18 wherein said feed tube or said drop tube is lined with chrome oxide, magnesium oxide, zirconium oxide, silicon nitride, silicon carbide, or mixtures thereof, or platinum or platinum-gold alloy.

20 25. The apparatus of claim 18 wherein said feed tube or said drop tube is in a non-oxidizing atmosphere and is formed from or lined with graphite or boron nitride.

26. The apparatus of claim 18 wherein said discharge port is circular,
25 polygonal, elongate, an array of holes, a bare wire screen, or a ceramic coated wire screen.

27. The apparatus of claim 18 wherein said feedstock comprises irregularly shaped particles.
30

28. The apparatus of claim 27 wherein said feedstock is coal slag or coal fly ash.

29. The apparatus of claim 18 wherein said vibrating means is a magnet proximate said feed tube and an intermittently powered coil surrounding said drop tube proximate said magnet.

30. The apparatus of claim 18 wherein said vibrating means is a solenoid.

31. The apparatus of claim 18 wherein said heating means is radiant heat, convection heat, induction means, or dielectric means.

32. The apparatus of claim 31 wherein said radiant heat is provided by an electric heating element or gas fired or particle burning heating elements encircling the drop tube.

33. The apparatus of claim 31 wherein said convection heat is provided by direct flame or preheated air.

34. The apparatus of claim 18 wherein said feed means is a gravity feed.

35. A feed system for feeding irregularly shaped particles comprising:
(a) a feed tube oriented substantially vertically and having a substantially closed lower terminal portion with a discharge port therein;
(b) feed means for supplying a feedstock of irregularly shaped particles to the feed tube; and
(c) vibrating means for intermittently rapping the feed tube to cause discharge of the feedstock from the feed tube through said discharge port in a substantially vertical downward path as individualized particles.

36. The feed system of claim 35 wherein said feed tube is formed from ceramics or refractory metals.

5 37. The feed system of claim 36 wherein said ceramic is quartz, borosilicate glass, silicon carbide or alumina.

38. The feed system of claim 36 wherein said refractory metal is iron-nickel-chromium alloy or platinum.

10 39. The feed system of claim 35 wherein said feed tube is lined chrome oxide, magnesium oxide, zirconium oxide, silicon nitride, silicon carbide, or mixtures thereof, or platinum or platinum-gold alloy.

15 40. The feed system of claim 35 wherein said feed tube is in a non-oxidizing atmosphere and is formed from or lined with graphite or boron nitride.

41. The feed system of claim 35 wherein said discharge port is circular. polygonal, elongate, an array of holes, a bare wire screen, or a ceramic coated wire screen.

20 42. The feed system of claim 35 wherein said feedstock is coal slag or coal fly ash.

25 43. The feed system of claim 42 wherein said feedstock particles are in the range of about 0.001 to 10 mm in size.

44. The feed system of claim 35 wherein said vibrating means is a magnet proximate said feed tube and an intermittently powered coil surrounding said feed tube proximate said magnet.

30 45. The feed system of claim 35 wherein said vibrating means is a solenoid.

46. A method of using the feed system of claim 35 wherein irregularly shaped particles are fed to said feed tube by gravity.

5 47. The method of claim 35 wherein said rapping is carried out at a sufficient rate and energy to cause said particles to discharge from said discharge port at a substantially continuous rate as individualized particles.

10 48. A process for feeding irregularly shaped particles comprising the steps of:

 (a) feeding irregularly shaped particles to a feed tube oriented substantially vertically and having a substantially closed lower terminal portion with a discharge port substantially centered on the vertical axis of said feed tube;

15 (b) intermittently rapping said feed tube to cause said particles to discharge from said feed tube in a substantially vertical downward path as individualized particles.

20 49. The process of claim 48 wherein said rapping is carried out at a rate and energy sufficient to cause the particles to discharge at a substantially continuous rate.


25 50. The process of claim 48 wherein said discharge port is circular, polygonal, elongate, an array of holes, a bare wire screen, or a ceramic coated wire screen.

ABSTRACT OF THE DISCLOSURE

The present invention provides spheroidal particles of coal slag. The spheroidal particles have at least a hard outer shell, a diameter in the range of about 0.001 mm to 5 mm and comprise SiO_2 , Al_2O_3 , Fe_2O_3 , FeO , CaO , Na_2O and K_2O . The present invention also provides a process for spherulizing irregularly shaped particles of coal slag. The process includes the steps of: (a) providing a drop tube having an upper portion, a central portion and a lower portion; (b) delivering a feedstock of irregularly shaped particles of coal slag to the upper portion of the drop tube at a rate at which the particles remain individualized; (c) heating the particles to a sufficient temperature by providing heat to the outer surface of the central portion of the drop tube to cause at least the outer surface of the particles to melt such that a majority, i.e., at least 50 weight percent, of the particles become spheroidal due to surface tension; and (d) cooling the particles, preferably in the lower portion of the drop tube, to prevent agglomeration. The present invention further provides an apparatus for spherulizing particles comprising: (a) a substantially vertical elongate drop tube; (b) a feed tube extending into the upper terminal portion of the drop tube and having a substantially closed lower terminal portion with a discharge port therein, the vertical axis of the discharge port being substantially on the vertical axis of the drop tube; (c) feed means for supplying a feedstock to the feed tube; (d) vibrating means for intermittently rapping the feed tube to cause discharge of the feedstock from the feed tube in a substantially vertical downward path through the drop tube as individualized particles; (e) heating means proximate the outer portion of the drop tube and proximate a central portion of the drop tube, the heating means being capable of providing sufficient heat within the drop tube to cause the viscosity of at least the outer portion of the particles to become sufficiently low to allow the surface tension of the particles to spherulize the particles; (f) cooling means to effect cooling of the spherulized particles such that the particles do not adhere to each other; and (g) means for collecting the spherulized particles.

ELEMENTS OF THE INVENTION IN THE DRAWINGS

- 10 Apparatus
- 11 Feedstock
- 12 Delivery system
- 13 Feed tube
- 14 Discharge port
- 15 Funnel
- 16 Magnet
- 17 Drop tube
- 18 Coil
- 19 Outer wall of drop tube 17
- 20 Inner wall of drop tube 17
- 21 Heating element
- 22 Insulation
- 23 Shell
- 24 Blower box cover
- 25 Blower box
- 26 Exhaust fan
- 27 Funnel
- 28 Catch tube
- 29 Thermocouple tube
- 30 Port
- 31 Sleeve
- 32 Solenoid
- 34 Spheroidal coal slag
- 36 Suspected contamination

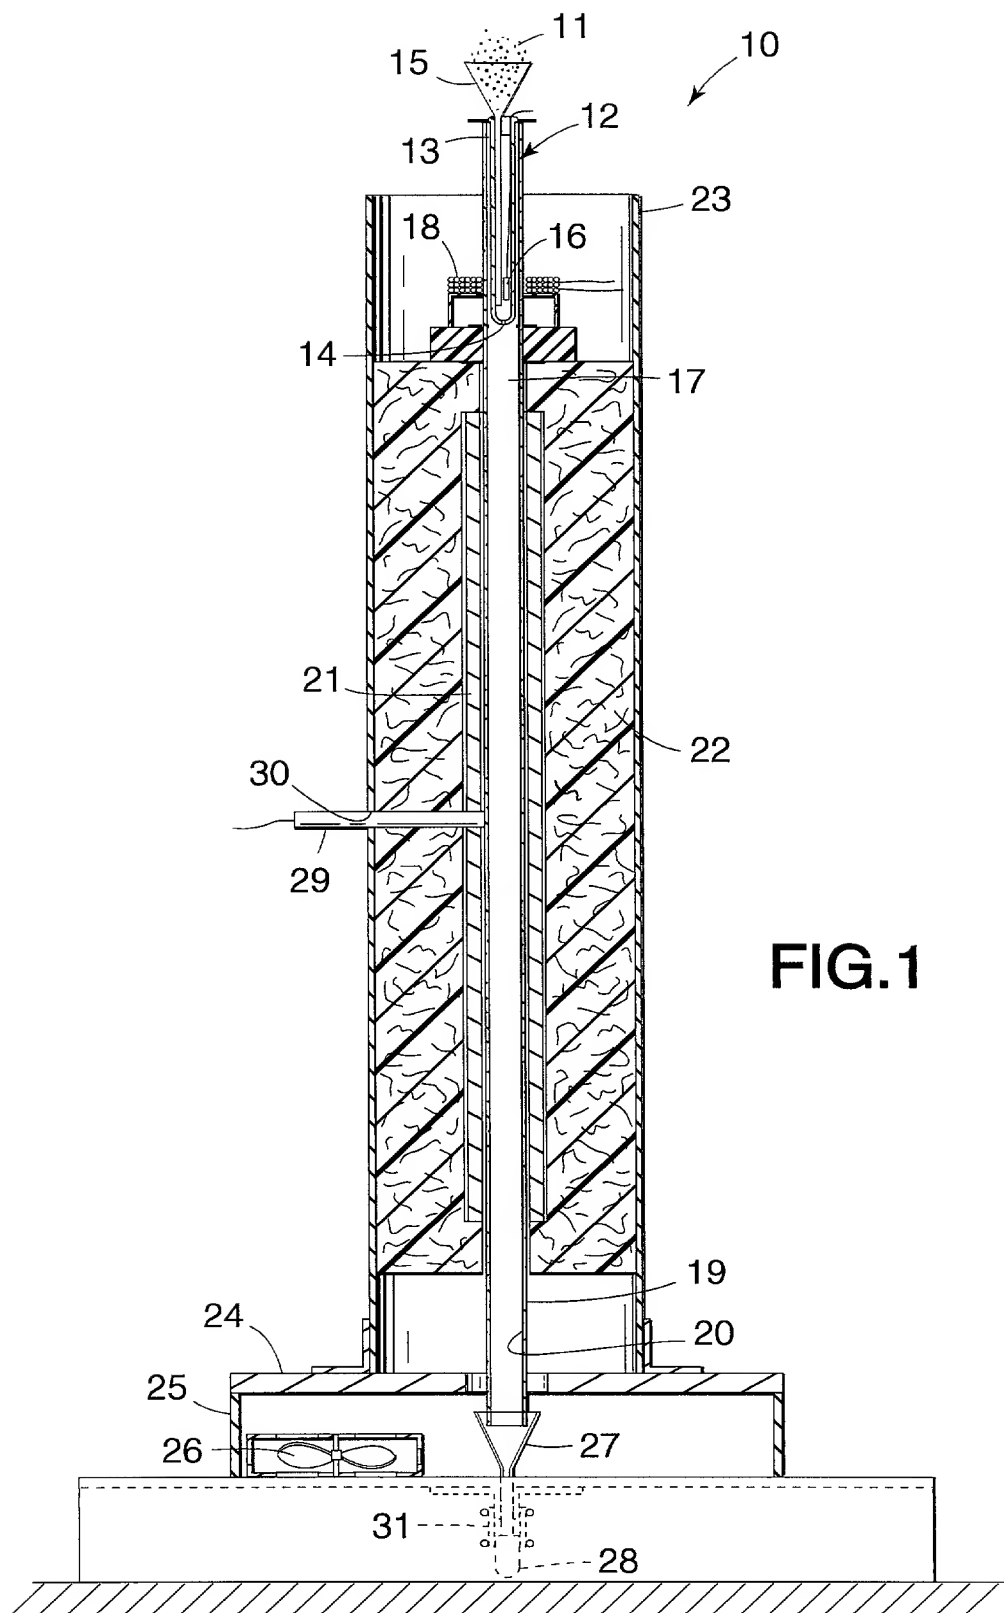

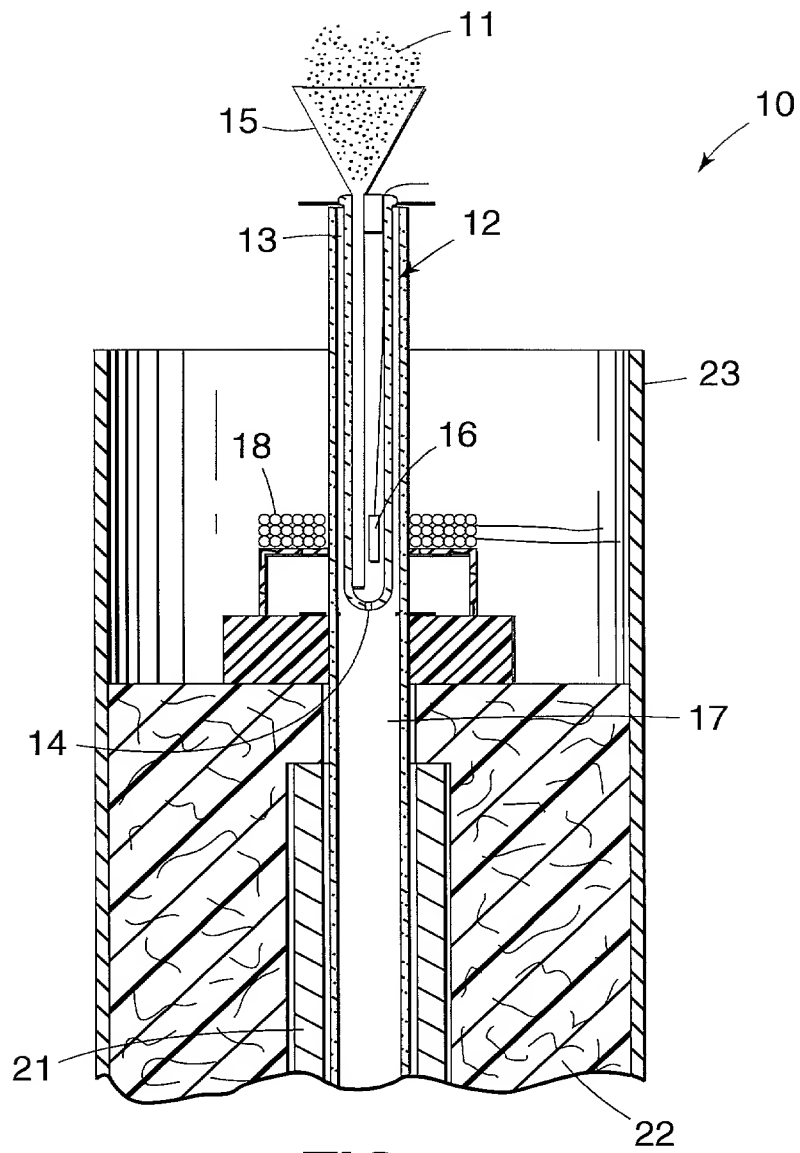


FIG.2

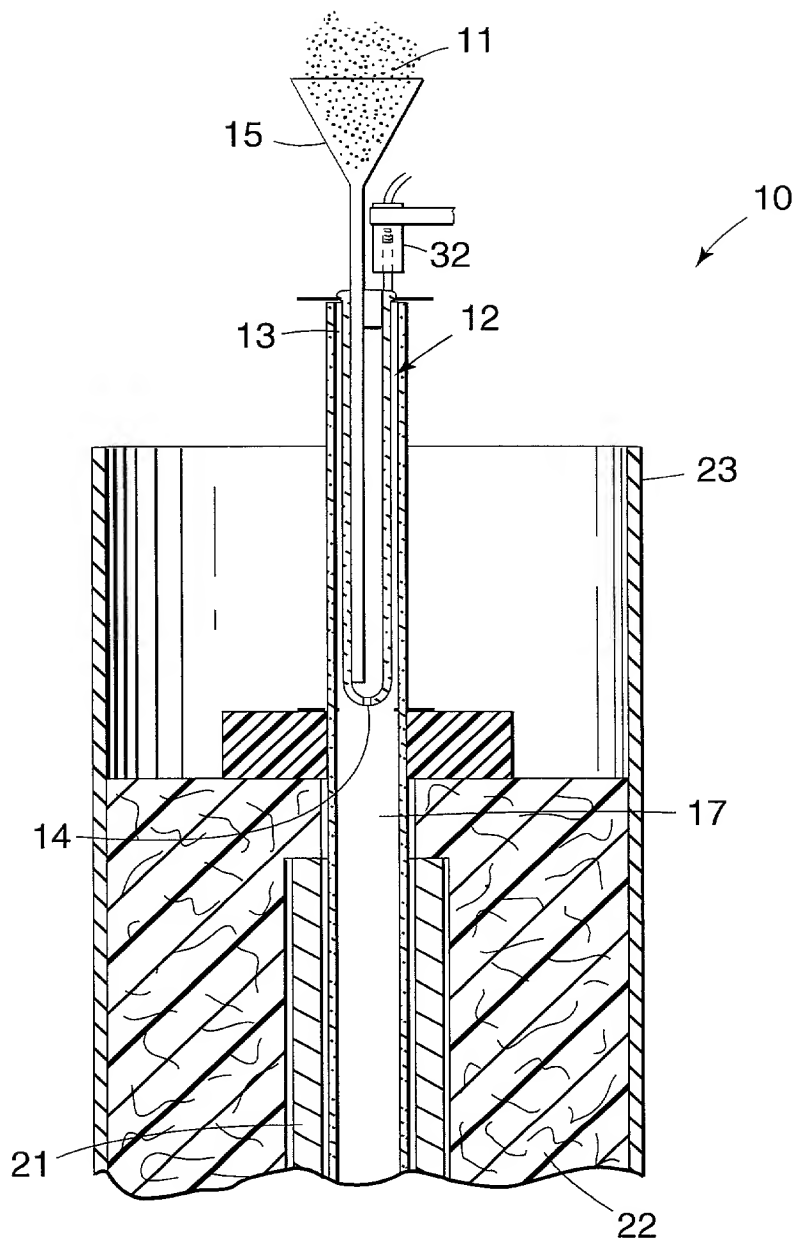


FIG.3

DECLARATION, POWER OF ATTORNEY, AND PETITION

I, a below named inventor, depose and say that: (1) my residence, citizenship, and mailing address are indicated below; (2) I have reviewed and understand the contents of attached specification, including the claims, as amended by any amendment specifically referred to herein, (3) I believe that I am the original, first, and sole inventor or discoverer of the invention or discovery in

**SPHEROIDAL SLAG AND FLY ASH PARTICLES AND APPARATUS AND
PROCESS FOR PRODUCING SAME**


described and claimed therein and for which a patent is sought; and (4) I hereby acknowledge my duty to disclose to the Patent and Trademark Office all information known to me to be material to the patentability as defined in Title 37, Code of Federal Regulations, §1.56.*

I hereby appoint Carole Truesdale, Reg. No. 30696, my attorney with full powers (including the powers of appointment, substitution, and revocation) to prosecute this application and any division, continuation, continuation-in-part, reexamination, or reissue thereof, and to transact all business in the Patent and Trademark Office connected therewith; the mailing address and the telephone number of the above-mentioned attorney is

Carole Truesdale
Truesdale Law Office
642 Nightingale Blvd.
Stillwater, MN 55082
Telephone No. (612) 430-1670

The undersigned petitioner declares further that all statements made herein of his own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Wherefore, I pray for grant of Letters Patent for the invention or discovery described and claimed in the attached specification and I hereby subscribe my name to the foregoing specification and claims, declaration, power of attorney, and this petition, on the day set forth below.

 Jan. 30, 1998
Paul W. Meyer Date: January 30, 1998
Residence: City of Woodbury
County of Washington
State of Minnesota
Citizenship: USA
Post Office 499 Cottage Grove Drive
Address: Woodbury, MN 55129

Under the Paperwork reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

STATEMENT CLAIMING SMALL ENTITY STATUS (37 CFR 1.9(f) & 1.27(c))--SMALL BUSINESS CONCERN

Docket No. 1017US01

Applicant, Patentee, or Identifier: Paul W. Meyer

Application or Patent No.: _____

Filed or Issued: January 30, 1998Title: SPHEROIDAL SLAG AND FLY ASH PARTICLES AND APPARATUS AND PROCESS FOR PRODUCING SAME

I hereby state that I am

- ☒ the owner of the small business concern identified below:
☐ an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF SMALL BUSINESS CONCERN: Diamond Grit of Ortonville, Inc.ADDRESS OF SMALL BUSINESS CONCERN: 499 Cottage Grove Drive, Woodbury, MN, 55129

I hereby state that the above identified small business concern qualifies as a small business concern as defined in 13 CFR Part 121 for purposes of paying reduced fees to the United States Patent and Trademark Office, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time, or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I here state that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in:

- ☒ the specification filed herewith with title as listed above.
☐ the application identified above.
☐ the patent identified above.

If the rights held by the above identified small business concern are not exclusive, each individual, concern, or organization having rights in the invention must file separate statements as to their status as small entities, and no rights to the invention are held by any person, other than the inventor who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern, or organization having any rights in the invention is listed below:

- ☒ no such person, concern, or organization exists.
☐ each such person, concern, or organization is listed below.

Separate statements are required from each named person, concern or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate, (37 CFR 1.28(b))

NAME OF PERSON SIGNING: Patrick E. Braegelmann


TITLE OF PERSON IF OTHER THAN OWNER: _____

ADDRESS OF PERSON SIGNING: 499 Cottage Grove Drive, Woodbury, MN, 55129SIGNATURE Patrick E. BraegelmannDATE 1/30/98

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

United States Patent & Trademark Office

Office of Initial Patent Examination – Scanning Division

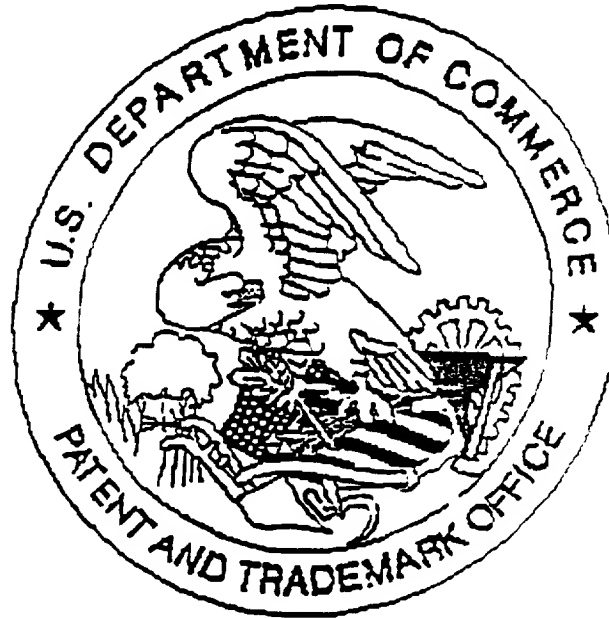

Application deficiencies found during scanning:

1. Application papers are not suitable for scanning and are not in compliance with 37 CFR 1.52 because:
 - ☐ All sheets must be the same size and either A4 (21 cm x 29.7 cm) or 8-1/2" x 11". Pages _____ do not meet these requirements.
 - ☐ Papers are not flexible, strong, smooth, non-shiny, durable, and white.
 - ☐ Papers are not typewritten or mechanically printed in permanent ink on one side.
 - ☐ Papers contain improper margins. Each sheet must have a left margin of at least 2.5 cm (1") and top, bottom and right margins of at least 2.0 cm (3/4").
 - ☐ Papers contain hand lettering.
2. Drawings are not in compliance and were not scanned because:
 - ☐ The drawings or copy of drawings are not suitable for electronic reproduction.
 - ☐ All drawings sheets are not the same size. Pages must be either A4 (21 cm x 29.7 cm) or 8-1/2" x 11".
 - ☐ Each sheet must include a top and left margin of at least 2.5 cm (1"), a right margin of at least 1.5 cm (9/16") and a bottom margin of at least 1.0 cm (3/8").
3. Page(s) _____ are not of sufficient clarity, contrast and quality for electronic reproduction.
4. Page(s) _____ are missing.
5. OTHER: DRAWING Figure 4-7 NOT SUFFICIENT FOR REPRODUCTION
IMAGES TOO DARK

ml